

Proflow Finish kerakoll

High performance
fibre reinforced single
component smoothing
compound.



A true all round smoothing compound.

Proflow Finish is a fibre reinforced, moisture tolerant smoothing compound suitable for use in any installation type, for any substrate and with any type of resilient flooring at depths of up to 60mm.

A single component compound with a free flowing formulation, with a 30 minute wet edge and working time for effortless application, Proflow Finish gives a flawless surface finish and is able to accept foot traffic after 90 minutes and floor coverings after 3.5 hours.


Substrate	Covering
Mineral screeds made with Keracem Eco as binder or pre-mixed product	LVT and design flooring
Cement-based screeds	Vinyl, sheet vinyl and safety flooring
Calcium sulphate-based screeds	Hardwood floors
Prefabricated concrete or fresh concrete castings	Textiles, rubber, PVC, linoleum, carpet
Ceramic floors	Raised floors
Flooring grade plywood	
Gypsum fibre or fibre-cement panels	
Metal substrates	



Proflow Finish

High performance fibre reinforced single component smoothing compound. Rapid setting with prolonged working time.

Proflow Finish's advanced formulation allows for complete control under the trowel whilst maintaining high flow properties, exceptional repair properties, extended working and wet edge time and delivers a flawless surface finish upon drying.

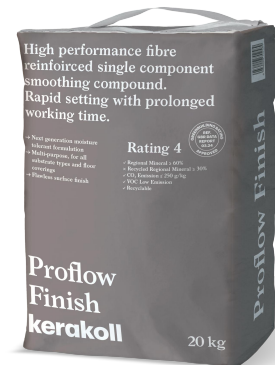

- Next generation moisture tolerant formulation
- Multipurpose, for all substrate types and floor coverings
- Flawless surface finish
- Thicknesses from 3 mm to 60 mm
- Moisture tolerant, can be used below DPM
- Free flowing formulation with prolonged wet edge and working time, combined with rapid lay on time
- Formulated with high-performance materials with low environmental impact
- Suitable for any type of resilient floor covering
- Apply by hand trowel, cam rake or pin level. Also suitable for use with mechanical pump applications

<p>≈ 4.5 m² x 3 mm of thickness</p>	<p>4.5 - 5.2 l per 1 bag</p>	<p>≈30 min. wet edge</p>	<p>≈3.5 hours. before laying</p>	<p>moisture tolerant</p>
<p>rake/spike roller application</p>	<p>highly flexible</p>	<p>for all resilient flooring</p>	<p>under-floor heating</p>	<p>manual - mechanical mixing</p>

kerakoll



kerakoll.com