

GEKKO[®]
FLOORING ADHESIVES



WHAT IS GEKKO®?

Gekko Flooring Adhesives draws on over 50 years of technical adhesive experience bringing our customers a complete range of sprayable bonding solutions for the floor coverings market. Expertly engineered self-contained pressurised adhesive systems for bonding floor & wall coverings. Installations include hygienic wall cladding, textile floorcoverings, underlay, PVC flooring profiles, linoleums, rubber floorcoverings, Marmoleum and vinyl floorcoverings.

What our customers say:

Its brilliant! From the very first time that I received the samples until now, I'm still using the product.

- Nick from Somerset

I like the product because its DCM free

- Gareth from Yorkshire

Good product. I am still using the product and using your canister. Can't wait for your new inventions!

- Michael from Wiltshire

PRODUCT MATRIX

SUBSTRATES

SUBFLOORS

	DCM Free	PVC Profiles	Wall Cladding	PU Underlay	Rubber Crumb Underlay	Rubber Floorcoverings	Linoleum (Marmoleum)	Sheet Vinyl / Vinyl Tile	LVT	LVT / SPC Loose Lay	Cushion Vinyl - Foam Back	Cushion Vinyl - Felt Back	Carpet - Gel back	Carpet - Felt Back	Carpet - Action Back	Carpet - Fibre Bonded	Carpet Tile - Bitumen Back	Carpet Tile - PVC Back	Carpet Tile - Cushion Back	Flooring Grade Ply	Hardboard	Chipboard	OSB Board	Laytex Screed	Concrete / Sand & Cement	Calcium Sulphate - Anhydrite Screeds	Non-absorbant - Ceramic	Steel - Raised Access	Plaster Board	EPS - Insulation Board		
CARPET SPRAY																																
G25	●			●									●	●							●	●	●	●	●	●	●				●	
G26	●			●									●	●							●	●	●	●	●	●	●				●	
VINYL SPRAY																																
G70	●										●	●									●	●	●	●	●	●	●					
PVC CONTACT ADHESIVE																																
G42	●	●	●			●		●	●												●	●	●	●	●	●	●			●	●	
TRADITIONAL CONTACT ADHESIVE																																
G51				●									●	●		●				●	●	●	●	●	●	●	●			●	●	
G52			●	●	●								●	●		●	●			●	●	●	●	●	●	●	●			●	●	
G53				●	●	●	●						●	●		●	●			●	●	●	●	●	●	●	●			●	●	
G55	●			●									●	●		●				●	●	●	●	●	●	●	●			●	●	
G56	●		●	●									●	●		●	●			●	●	●	●	●	●	●	●			●	●	
SURFACE TACKIFIERS																																
G47	●			●									●	●		●				●	●	●	●	●	●	●	●			●	●	
G57	●			●	●							●	●	●		●	●	●		●	●	●	●	●	●	●	●	●		●	●	●
G67	●			●	●					●			●	●		●	●	●		●	●	●	●	●	●	●	●	●		●	●	●

SYMBOLS



ZERO-FLAM Technology™

ZERO-FLAM Technology™ has been independently tested and proven to exceed all industry standards for flame projection control performance. When you combine its fortified high-performance polymers with the dual-component formula, you'll notice your productivity increase further, with its unrivalled sprayability and high-speed spray application.



CO-REZ Technology™

CO-REZ Technology™ is an exceptional formulation development incorporating a highly engineered resin and gas matrix. The results; **MORE GLUE-LESS GAS.**

What this means is an increase of up to 15% extra coverage per unit coupled with a 2-3 kilogram decrease in weight per canister system. There is nothing else quite like it anywhere on the market.



Water-based Adhesive

With an increasing awareness of the health and safety issues arising from adhesive application, it is becoming ever more important to reduce the use of solvents. Water-based adhesive technology is an environmentally friendly adhesive formulation, containing no V.O.C (Volatile Organic Compound) and very little odour meaning that working with the adhesives provides a great user experience. Water-soluble formulations also mean water-based adhesives are easy to clean-up with water when wet.



Dichloromethane Free


Non chlorinated adhesives void the need for health and safety phrases such as H351 and pose the lowest possible risk to your health. Our safer adhesives are designed to maintain the performance characteristic of their chlorinated alternative, so there is no drop-in adhesive performance. This symbol shows product's that are free from chlorinated solvents including Dichloromethane.



IMO "WHEELMARK" Approved

IMO Warrington Wheelmark Certification confirms that the tested **Gekko Flooring Adhesives** satisfy the smoke and toxicity test by meeting the total heat release and peak release as stated in the IMO Fire Procedure Code. The certification also guarantees that the adhesives have been tested to surface flammability test, IMO resolution **MSC 307(88)**.

SYSTEM

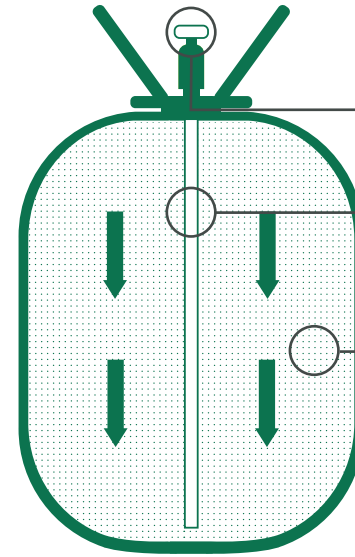

VALVE

Controls the flow of adhesive from the canister.


DIP TUBE

Reaches to the bottom of the canister to ensure that every drop of adhesive is used.

ADHESIVE & GAS MIXTURE

Engineered with care and precision with intent to be the very best in the world. Pressurised gas is designed to propel the adhesive out of the system.

GUN

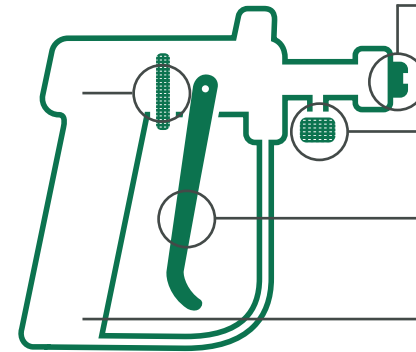

NOZZLE

Changeable nozzles designed to optimise spraying performance - subject to adhesive type.

HOSE CONNECTION

The attachment point to connect the gun to the canister via the hose.

TRIGGER

Pull the trigger and out comes the adhesive. Simple!

WHEEL

Use this to control the flow of adhesive dispersed from the gun.

VOLUMES



AEROSOL

Volume: 500ml
Size: 65mm x 238mm
Weight*: Up to 0.600kg



CANISTER

Volume: 22ltr
Size: 310mm x 450mm
Weight*: Up to 23kg

G25

NON CHLORINATED PREMIUM CARPET SPRAY

- Dichloromethane Free Non-Chlorinated Formulation.
- Quick Drying.
- Low Odour.
- Ideal for the fast and easy installation of most textile floor coverings.



G26


HIGH TACK PREMIUM DCM FREE CARPET SPRAY

- Dichloromethane Free Non-Chlorinated Formulation.
- Tacky Film.
- Low Odour.
- 50% More Coverage than a standard carpet spray.



NEW
IN 2023

TECHNICAL DATA

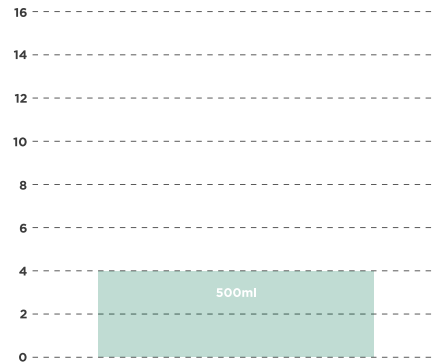

APPLICATION TYPE:
Single-sided

FLASH OFF TIME**:
1 min

OPEN TIME**:
30 mins

COLOUR:
 Clear/White

ADHESIVE TYPE:
SBR

SPRAY TYPE:



Web

AVAILABLE SIZE:




500ml

SQUARE METRE COVERAGE (m²)*:

	500ml
Single-sided	4m²
Double-sided	n/a

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.

TECHNICAL DATA

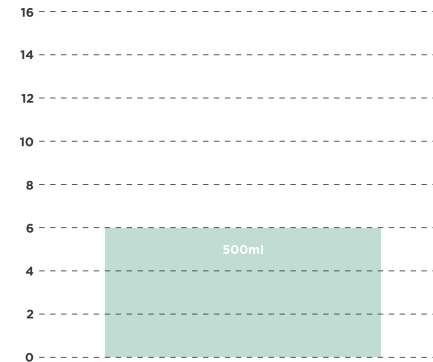

APPLICATION TYPE:
Single-sided

FLASH OFF TIME**:
1 min

OPEN TIME**:
30 mins

COLOUR:
 Clear/White

ADHESIVE TYPE:
SBR

SPRAY TYPE:



Web

AVAILABLE SIZE:



500ml

SQUARE METRE COVERAGE (m²)*:

	500ml
Single-sided	6m²
Double-sided	n/a

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.



LVT TRAINING CENTRE BASED IN WOLVERHAMPTON.

COURSES:

- LVT FITTING COURSE
- LVT HERRINGBONE MASTERCLASS
- DESIGN FLOOR COURSE
- STAIRRODS COURSE

6 FITTERS PER COURSE TO ENSURE THE HIGHEST QUALITY OF TRAINING

100'S OF STAR REVIEWS

PLEASE CONTACT US FOR FURTHER INFORMATION



"Paddy has somehow taught me more in 3 days than I've learnt in 20 years"

Kris from Stoke


G42

PVC PROFILE HIGH GRAB PU CONTACT ADHESIVE

- Dichloromethane Free Non-Chlorinated Formulation.
- Lifetime guarantee** against bond failure caused by plasticizer migration.
- Tested for use with **Quantum Flooring Solutions** PVC Profiles.
- 100% Waterproof with a temperature resistance of 169°C.
- Passes sheer strength requirements for **BS EN 14259**.



TECHNICAL DATA

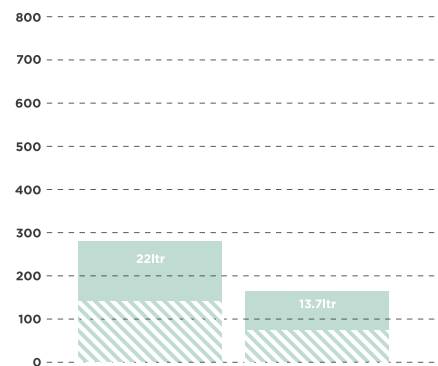

	22ltr	13.7ltr
Single-sided	280m ²	175m ²
Double-sided	140m ²	87.5m ²
Linear Metres Bonded	1400m	875m

APPLICATION TYPE:

Double-sided

FLASH OFF TIME**:

4 - 5 mins

OPEN TIME**:

15 mins

COLOUR:

○ **Clear**

ADHESIVE TYPE:

PU

GUN TYPE:

Pro Gun

HOSE TYPE:

PU

TIP:

8002

SPRAY TYPE:

Web

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.
*** Based on 100mm PVC Substrate


G47

GENERAL PURPOSE SURFACE TACKIFIER

- Simple, Fast and Cost effective
- Applied as a single-sided application directly to the subfloor.
- Provides a permanently tacky film of repositionable adhesive.
- Dichloromethane Free Non-Chlorinated Formulation.
- Designed for the installation of textile floorcoverings.



TECHNICAL DATA

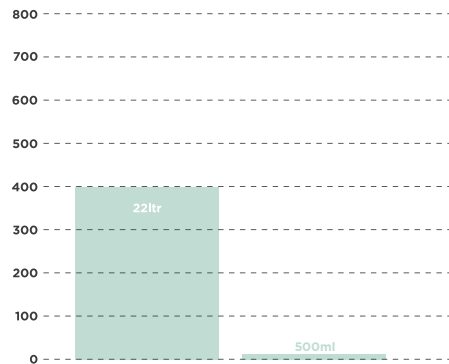

APPLICATION TYPE:

Single-sided

FLASH OFF TIME**:

2 - 3 mins

OPEN TIME**:

n/a

COLOUR:

○ **Clear**

ADHESIVE TYPE:

SBR

GUN TYPE:



HOSE TYPE:



TIP:



SPRAY TYPE:



SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	400m ²	10m ²
Double-sided	n/a	n/a

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.


G51

GENERAL PURPOSE CONTACT ADHESIVE

- Immediate permanent bonds can be achieved using a double-sided application.
- Versatile adhesive suitable for use with a variety of substrates.
- Fast drying with a long open time.
- Low odour.
- Good temperature resistance of up to 105°C.



TECHNICAL DATA

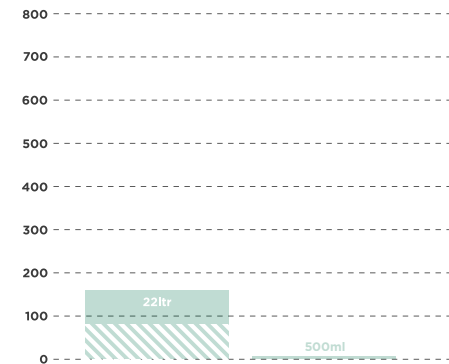

APPLICATION TYPE:

Double-sided

FLASH OFF TIME**:

1 - 3 mins

OPEN TIME**:

40 mins

COLOUR:

○ **Clear**

ADHESIVE TYPE:

SBR

GUN TYPE:



HOSE TYPE:



TIP:



SPRAY TYPE:



SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	160m ²	n/a
Double-sided	80m ²	4m ²

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.


G52

HIGH PERFORMANCE CONTACT ADHESIVE

- **CO-REZ Technology™** results in an increase of up to 15% extra surface coverage.
- Ideal for the vertical installation of hygienic wall cladding.
- Fast drying with a long open time.
- Good temperature resistance of up to 115°C.



TECHNICAL DATA

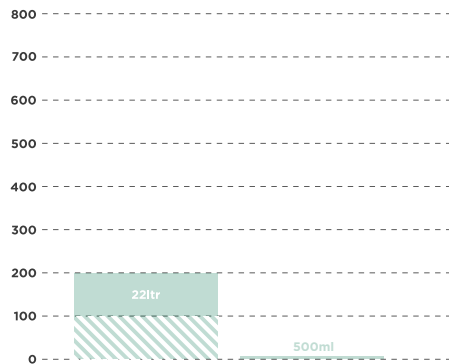

SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	200m²	n/a
Double-sided	100m²	4m²

APPLICATION TYPE:
Double-sided

FLASH OFF TIME**:
1 - 2 mins

OPEN TIME**:
60 mins

COLOUR:
○ **Clear**

ADHESIVE TYPE:
SBR

GUN TYPE:
 **Pro Gun**

HOSE TYPE:
 **Rubber**

TIP:
 **6501**

SPRAY TYPE:
 **Web**

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.


G53

IMO MARINE CERTIFIED CONTACT ADHESIVE

- **IMO "Wheelmark" Approved**, for a variety of marine Installations.
- Designed for bonding rubber floor coverings.
- Successfully used for bonding Marmoleum.
- Fast drying with a long open time.
- Good temperature resistance of up to 120°C.



TECHNICAL DATA

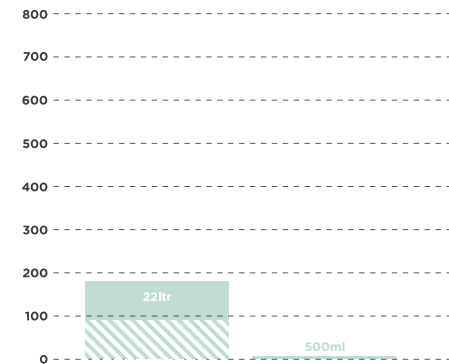

SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	180m²	n/a
Double-sided	90m²	4m²

APPLICATION TYPE:
Double-sided

FLASH OFF TIME**:
2 - 4 mins

OPEN TIME**:
40 mins

COLOUR:
○ **Clear**


ADHESIVE TYPE:
SBR

GUN TYPE:
 **Pro Gun**

HOSE TYPE:
 **Rubber**

TIP:
 **6501**

SPRAY TYPE:
 **Web**



*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.


G55

NON CHLORINATED GENERAL PURPOSE CONTACT ADHESIVE

- Dichloromethane Free Non-Chlorinated Formulation.
- Immediate permanent bonds can be achieved using a double-sided application.
- Versatile adhesive suitable for use with a variety of substrates.
- Fast drying with a long open time.



TECHNICAL DATA

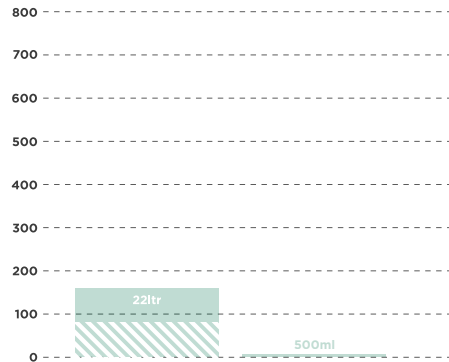

APPLICATION TYPE:
Double-sided

FLASH OFF TIME**:
2 - 3 mins

OPEN TIME**:
35 mins

COLOUR:
○ **Clear**

ADHESIVE TYPE:
SBR

GUN TYPE:
 **Pro Gun**

HOSE TYPE:
 **Rubber**

TIP:
 **6501**


SPRAY TYPE:
 **Web**

SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	160m²	4m²
Double-sided	80m²	2m²

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.



 Apprenticeships



CP ASSESSMENTS ARE A WELL-ESTABLISHED, HIGHLY REGARDED FLOORCOVERINGS TRAINING PROVIDER SPECIALISING IN APPRENTICESHIPS.

OVER 19000FT² OF TRAINING FACILITIES

OVER 40 PRACTICAL TRAINING BAYS


WET ROOMS

LVT

TEXTILE

COMMERCIAL VINYL
SUB-FLOOR PREPARATION

FULL SIZE STAIRCASE
ASSESSING & TESTING

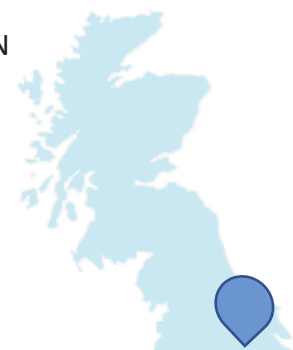

CP Assessments Ltd, Unit 5 Globe Court,
Coal Pit Road Industrial Estate, Denaby Main,
Doncaster, South Yorkshire, DN12 4LH

Tel 01709 868181




G56

NON CHLORINATED HIGH GRAB CONTACT ADHESIVE

- Dichloromethane Free Non-Chlorinated Formulation.
- 15% extra coverage.
- Fast drying with a long open time.
- High grab, high strength formulation.
- Versatile adhesive suitable for use with a variety of substrates.



TECHNICAL DATA

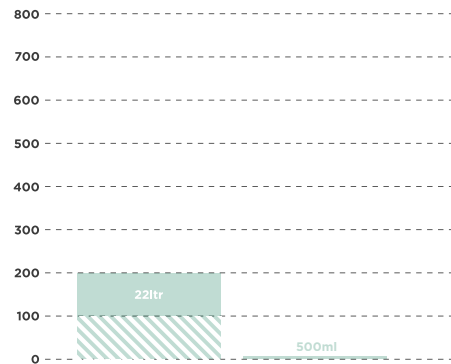

SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	200m ²	n/a
Double-sided	100m ²	4m ²

APPLICATION TYPE:
Double-sided

FLASH OFF TIME**:
2 - 3 mins

OPEN TIME**:
35 mins

COLOUR:
○ **Clear**

ADHESIVE TYPE:
SBR

GUN TYPE:



HOSE TYPE:



TIP:



SPRAY TYPE:




*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.


G57

HIGH PERFORMANCE PREMIUM SURFACE TACKIFIER

- **Indoor Air Emissions Certified EC1 Plus.**
- Provides a high performance tacky film which is both permanent and fully repositionable.
- Dichloromethane Free Non-Chlorinated Formulation.
- Suitable for double stick carpet applications.



TECHNICAL DATA

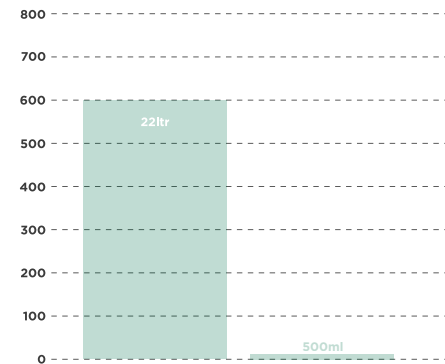

SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	600m ²	12m ²
Double-sided	n/a	n/a

APPLICATION TYPE:
Single-sided

FLASH OFF TIME**:
1 - 2 mins

OPEN TIME**:
n/a

COLOUR:
○ **Clear**

ADHESIVE TYPE:
SBR

GUN TYPE:



HOSE TYPE:



TIP:



SPRAY TYPE:



*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.


G67

WATERBASED HIGH COVERAGE SURFACE TACKIFIER

- Suitable for use with loose lay LVT.
- Waterbased technology.
- Non-flammable propellant.
- Provides a permanently tacky film of repositionable adhesive.
- Designed for the installation of textile floorcoverings.
- Safe for use in occupied areas.



TECHNICAL DATA

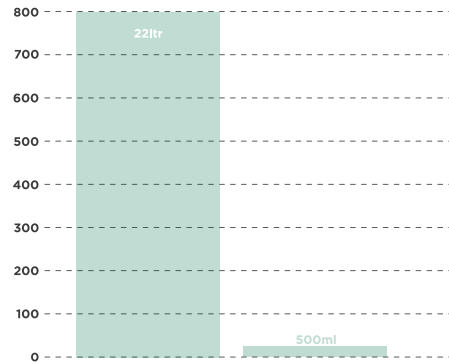

SQUARE METRE COVERAGE (m²)*:

	22ltr	500ml
Single-sided	800m²	25m²
Double-sided	n/a	n/a

APPLICATION TYPE:
Single-sided

FLASH OFF TIME**:
10 mins

OPEN TIME**:
n/a

COLOUR:
○ **Clear**

ADHESIVE TYPE:
AcrylicCo-Polymer

GUN TYPE:



Wand Gun

HOSE TYPE:



Rubber

TIP:



9501

SPRAY TYPE:



Snowflake

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.


G70

VINYL FIXING SPRAY

- Dichloromethane Free Non-Chlorinated Formulation.
- Sprayable Acrylic.
- Ideal for the fast and easy installation of Sheet Vinyl and Vinyl Tile.
- Plasticizer Migration Resistant.
- Suitable for use with a variety of Subfloors.



TECHNICAL DATA

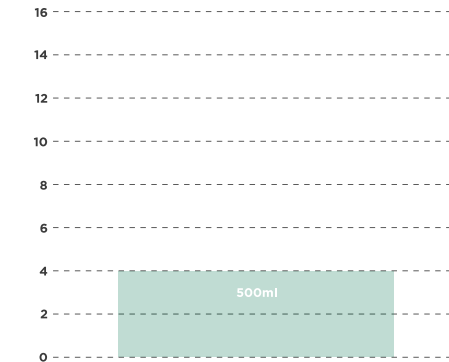

SQUARE METRE COVERAGE (m²)*:

	500ml
Single-sided	4m²
Double-sided	n/a

APPLICATION TYPE:
Single-sided

FLASH OFF TIME**:
2 - 5 mins

OPEN TIME**:
50 mins

COLOUR:
○ **Clear**

ADHESIVE TYPE:
Acrylic

SPRAY TYPE:



Web

AVAILABLE SIZE:



500ml

*consult the Spray Manual for a more detailed tutorial on the bonding process.
**depending on environment & ambient temperature.



QUIN GLOBAL KICKOFF KIT

Inside this box lies the key to reaching the optimum potential of our **TensorGrip®**, **QDEK®**, **Gekko®** and **Flexi Spray®** ranges, bringing your work to new heights of quality and performance while incurring absolutely no additional cost to your first canister purchase*. We are proud to introduce the **Quin Global Kick Off Kit**.

This unique package comes with all the essential tools for bonding, including a Professional Spray Gun, Hose, Gun Tip, Roller and a Quin-branded Ball. Everything to ensure that you are getting the very best out of our adhesive systems.

Each Kick Off Kit contains*:



Spray Gun



4 Metre Hose



Gun Tip



Quin Football

*Terms and conditions apply.
**Other accessories such as gun tips, rollers, wrenches & wire brushes are included in some, but not all, kits depending on the adhesive selected.

CONTACT US

GEKKO A BRAND OF QUIN GLOBAL (UK) LTD
Unit 1, Ruthvenfield Avenue, Inveralmond Industrial Estate, Perth, United Kingdom, PH1 3WB
www.gekko-adhesives.com / www.quinglobal.com
sales.uk@qinglobal.com / +44 (0) 1738 494919

@gekkoadhesivesuk



Copyright © 2021 by Quin Global (UK) Ltd.
All rights reserved. This publication or any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of the publisher.
Printed in the UK.

DISCLAIMER

Before using the product, the user should carry out any necessary tests in order to ensure that the product is suitable for the intended application. Moreover, all users should contact the seller or the manufacturer of the product for additional technical information concerning its use if they think that the information in their possession needs to be clarified in any way, whether for normal use or a specific application of our product. Our guarantee applies within the context of the statutory regulations and provisions in force, current professional standards and in accordance with the stipulations set out in our general sales conditions. The information detailed in the present technical data sheet is given by way of indication and is not exhaustive. The same applies to any information provided verbally by telephone to any prospective or existing customer.

GEKKO®

FLOORING ADHESIVES

A BRAND OF
QUIN : ADHESIVE
GLOBAL INNOVATORS

www.quinglobal.com | www.gekko-adhesives.com
@gekkoadhesivesuk | +44 (0) 1738 494 919

V1.0 - 11.2021